

NEW

Advanced Autoclave

- Automatic discharge of high temperature pressure 3 times, removal of air pockets
- X-ray inspection of all chamber welds
- Heater overheating prevention sensor and automatic water level control sensor
- Door Sensor (Gating)
- Automatic refill of distilled water system
- LCD Touch Display
- Backflow prevention function
- Equipped with a steam reduction device
- Built-in Printer

	BF-45X	BF-60X	BF-90X	BF-110X
Volume	45L	60L	90L	116L
Heater	3kw	3kw	4.5kw	4.5kw
Sensor	PT-100(Sterilization only)			
Error	±0.5℃			
Display	LCD display			
Voltage	220V			
Set	50~134℃			
Texture	SUS304			
GW/NW	125/110kg	130/112kg	145 /114kg	156/129kg
Chamber size	Φ350X520	Φ350X630	Φ400X720	Φ450X730
Basket size	Φ320X350 (1ea)	Φ320X240 (2ea)	Φ360X280 (2ea)	Φ410X300 (2ea)
External size	(W)698 X (D)498 X (H)940mm	(W)698 X (D)498 X (H)1,110mm	(W)770 X (D)570 X (H)1,185mm	(W)788 X (D)588 X (H)1,255mm
Packaging size	(W)790 X (D)610 X (H)1,130mm	(W)800 X (D)600 X (H)1,230mm	(W)840 X (D)610 X (H)1,290mm	(W)870 X (D)650 X (H)1,410mm

Automatic discharge of high temperature pressure
3 times, removal of air pockets




Air Filter: Prevention of backflow



Vapor reduction device



LCD touch display

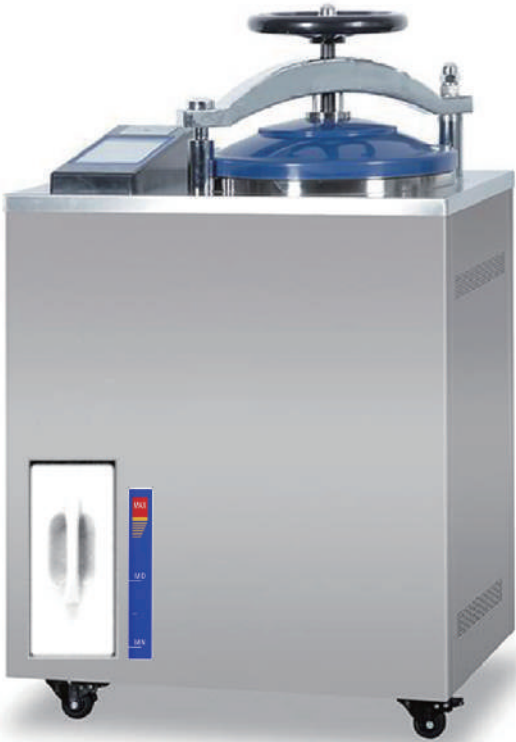

BF-90X