


NEW

New Autoclave

- Automatic discharge of high temperature pressure 3 times, removal of air pockets
- X-ray inspection of all chamber welds
- Heater overheating prevention sensor and automatic water level control sensor
- Door sensor (Gating)
- Automatic refill of distilled water system
- Printer interface

	BF-45B	BF-60B	BF-90B	BF-110B
Volume	45L	60L	90L	116L
Heater	3kw	3kw	4.5kw	4.5kw
Sensor	PT-100(Sterilization only)			
Temperature error	±0.5℃			
Voltage	220V			
Temperature set	115 -134℃			
Texture	SUS304			
GW/NW	79/58kg	106/80kg	120/90kg	133/106kg
Chamber size	Φ350X520	Φ350X630	Φ400X720	Φ450X730
Basket size	Φ320X350 (1ea)	Φ320X240 (2ea)	Φ360X280 (2ea)	Φ410X300 (2ea)
External size	(W)480 X (D)480 X (H)1,000mm	(W)480 X (D)480 X (H)1,120mm	(W)525 X (D)525 X (H)1,190mm	(W)555 X (D)555 X (H)1,250mm
Packaging size	(W)580 X (D)630 X (H)1,130mm	(W)580 X (D)630 X (H)1,230mm	(W)630X (D)680 X (H)1,290mm	(W)690 X (D)650 X (H)1,410mm

Automatic discharge of high temperature pressure
3 times, removal of air pockets

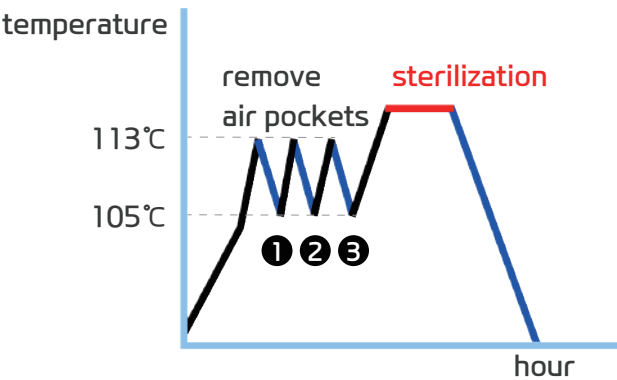

LCD Panel



BF-60B

Option



Hose



Autoclave gloves



Silicon gloves



Basket



Printer